ESMRMB 2011
European Society for Magnetic Resonance in Medicine and Biology
28th Annual Scientific Meeting, October 6–8, Leipzig/DE

Print this Page for Your Records Close Window

Control/Tracking Number: 11-SS-896-ESMRMB
Activity: Scientific Session
Current Date/Time: 5/30/2011 11:10:20 AM

Second order proton traps for multi-nuclear RF coils: Applied for 13C MRS in humans at 7T

Author Block: M. Meyerspeer[1,2,3], R. Gruetter[1,4,5], A. W. Magill[1,5];
[1]LIFMET / CIBM, ÉPFL, Lausanne, Switzerland, [2]Center for Medical Physics and Biomedical Engineering, Vienna Medical University, Vienna, Austria, [3]MR Centre of Excellence, Vienna Medical University, Vienna, Austria, [4]Department of Radiology, University of Geneva, Geneva, Switzerland, [5]Department of Radiology, University of Lausanne, Lausanne, Switzerland.

Abstract:
Purpose/Introduction:
Multi-nuclear coils typically consist of two sets of elements, tuned to operate at the proton and lower X-nuclear frequency. One technique to prevent coupling between the X and 1H elements at the 1H frequency is to insert traps into the non-proton elements. The simplest trap consists of a parallel inductor and capacitor tuned to block current at the proton frequency [1,2]. When adding an extra capacitor in series with the inductor [3], the trap can be designed to appear capacitive at low frequency which gives the freedom to replace one of the loop capacitors (C_{coil}) at the low frequency.
Methods:
Solving the conditions for the trap at 1H and X frequency

$$Z_{\mathrm{Tr}} = \left[\mathrm{j}\omega C_{\mathrm{p}} + \frac{1}{\frac{1}{\mathrm{j}\omega C_{\mathrm{s}}} + \mathrm{j}\omega L_{\mathrm{Tr}} + R_{\mathrm{Tr}}} \right]^{-1} \longrightarrow \begin{cases} \infty & \text{for } f_{\mathrm{HF}} = f_0(^1\mathrm{H}) \\ Z_{C_{\mathrm{coil}}} & \text{for } f_{\mathrm{LF}} = f_0(^{13}\mathrm{C}) \end{cases}$$

results in a pair of capacitors for an arbitrarily chosen trap inductance. Based on these calculations a series of second order traps was constructed L_{Tr}=20-175nH for use in a 7cm 13C-coil. For tests in the MR scanner, L_{Tr}=40nH was chosen. Performance was assessed on the bench using a single sniffer loop to measure B1 with and without traps in the presence of a single 1H loop.
Results:
Above a threshold of ca. 25nH, the trap effectively blocks interactions between the coils at the 1H frequency (Fig. 4a), while the sensitivity reduction of the 13C coil remains below 10%, even for very large trap inductances (L_{Tr}>L_{coil}).

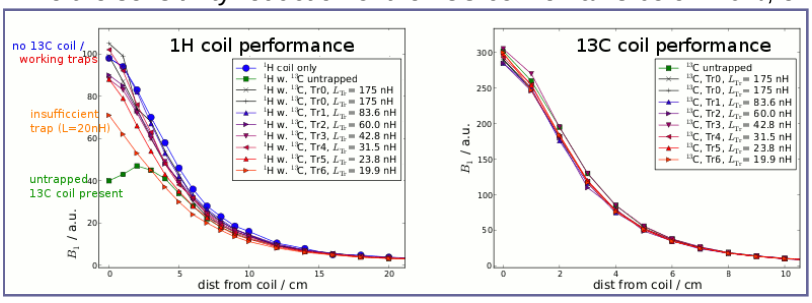

An S21 measurement shows excellent decoupling of 1H and X-coil:

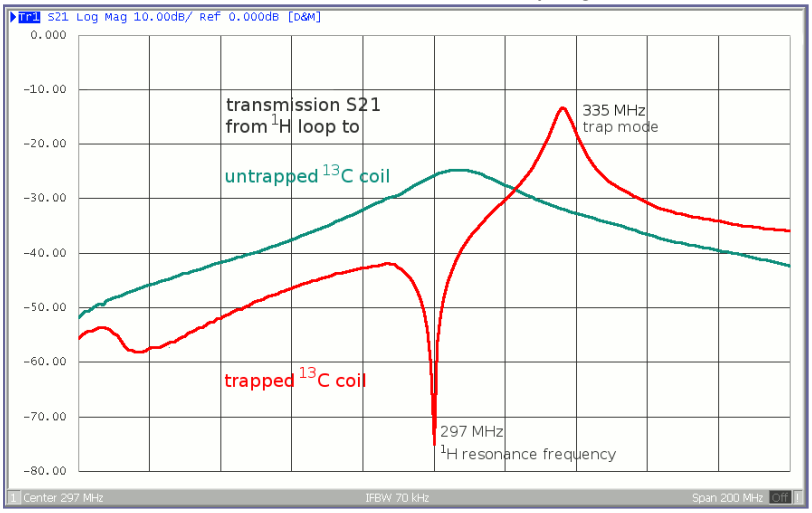

1H GRE images clearly show signal drop out when adding an untrapped 13C loop to the system, and how this effect is alleviated by a second order trap.

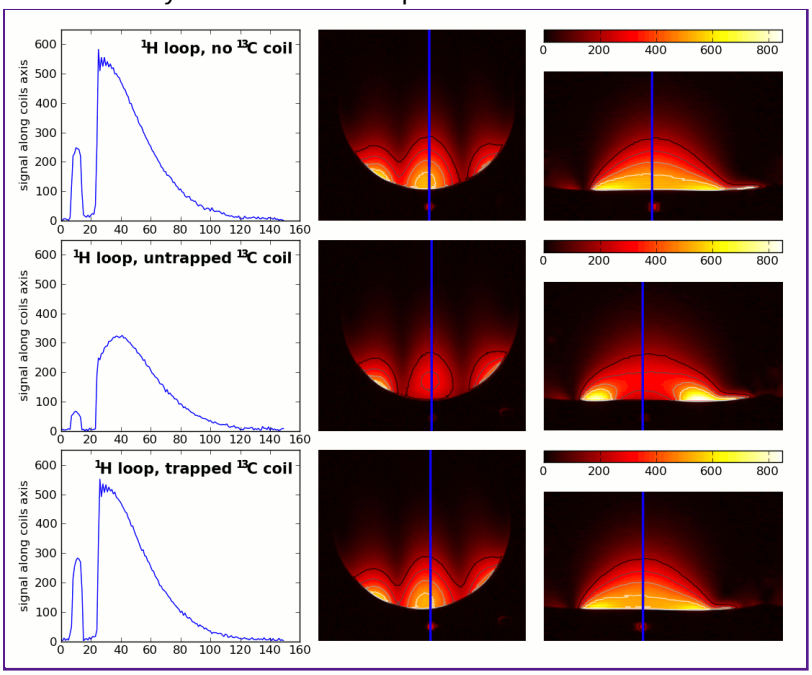

Adding the second order trap has only minor impact on 13C SNR (<5% as line width corrected comparison of peak height/noise, and <1% when SNR is determined from an AMARES fit.)

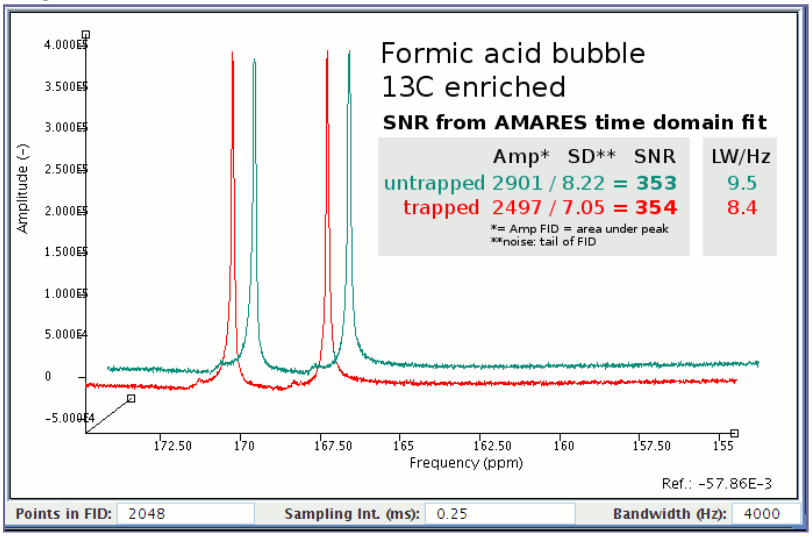

Discussion/Conclusion:

The concept of second order proton traps (consisting of an inductor and two capacitors) in coils for non-proton NMR allows control over the resonance frequency, the blocking frequency and the trap mode frequency. Effective proton

traps with relatively high L_{Tr}, and thus very effective blocking, can be constructed, which impose only small degradation of the non-1H coil sensitivity.

Acknowledgements:
FWF/J3031-N20. CIBM/EPFL and Leenaards and Jeantet Foundations.

References:

[1] M. Alecci, S. Romanzetti, J. Kaffanke et al. J Magn Reson, 181:203-211, 2006.
[2] A. Dabirzadeh and M. P. McDougall. Concepts in Magnetic Resonance Part B, 35B:121-132, 2009.
[3] A. Webb and N. Smith. Proc ISMRM, 18th Annual Meeting, #3818. Stockholm, Sweden, 2010.

:

Topic (Complete): • RF system
Presentation Preference (Complete): Poster Preferred - traditional (paper) poster preferred
YIA & EPOS (Complete):
Agree/Disagree: Yes, I agree to voluntarily submitting my abstract to EPOS™, in case I am assigned an oral presentation.

Status: Complete